HIGH PERFORMANCE DRIP TAPE





TAPE






LEE RAIN
SINCE 1946

Lee Rain, Inc. | Water Solutions for a Growing World | 2079 East Wheat Road, Vineland, NJ 08361 Toll Free: 877.533.7878 | Phone: 856.691.4030 | Sales@leerain.com | www.leerain.com

RAIN TAPE is designed and built to be a high performance product, thanks to its large section labyrinth, which ensures a turbulent flow of water, and a high resistance to clogging, RAIN TAPE provides crops with a uniform distribution of water and fertilizers, with length of runs amongst the best on the market.

RAIN TAPE is produced in a wide range of flow rates, spacings and thicknesses.

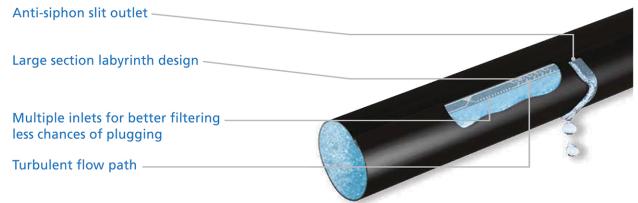

Rain Tape 5/8"

Mil	Feet/Coil	Coils/Pallet	Lbs./Coil	Recommended Operating PSI	Maximum Operating PSI
5	11,400	16	63	10	13
6	9,800	16	62	10	13
7	8,500	16	58	10	15
8	7,200	16	56	10	15
10	5,900	16	52	10	17

Rain Tape 7/8"


Mil	Feet/Coil	Coils/Pallet	Lbs./Coil	Recommended Operating PSI	Maximum Operating PSI
6	7,200	16	56	10	13
7	6,500	16	55	10	15
8	5,500	16	53	10	15
10	4,200	16	51	10	17

Spacing/Inches	5/8″	7/8″	GPH/Outlet	GPM/100′
4	х		0.26	1.34
			0.40	2.01
	x	x	0.16	0.40
8			0.26	0.67
			0.40	1.01
			0.16	0.27
12	X	x	0.26	0.44
			0.40	0.67
	х	х	0.16	0.20
16			0.26	0.34
			0.40	0.51




Maximum Length of Run for 90% Uniformity and 0% Slope



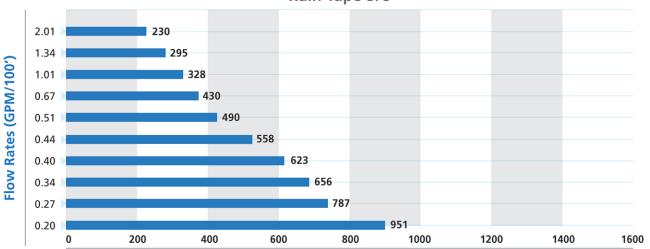

Length of Run (feet)

Rain Tape 7/8"

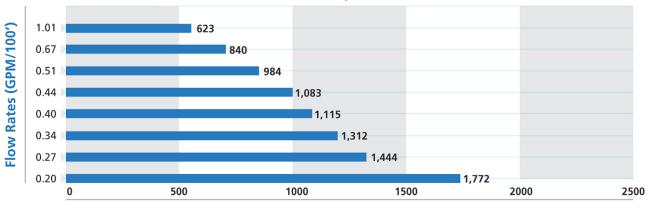

Length of Run (feet)



